# Beadlight

ZONDA

Surface Mount












# Zonda Range/Technical Data Sheet

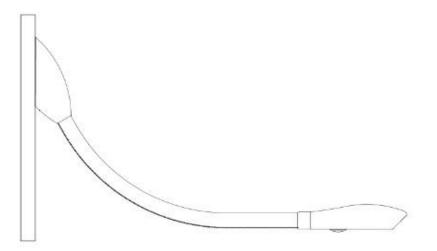



**Light**Dimensions in mm

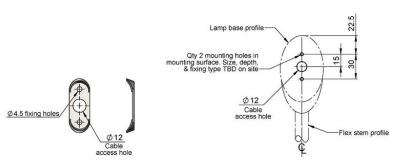

MOUNTING BRACKET

RECOMMENDED MOUNTING HOLE DETAILS Dimensions in mm

## **Product Description**

The Zonda Surface Mount light is fixed by a hidden mounting bracket in its base. The light features a flexible stem to allow it to be positioned as required.

#### Metal finish

The light comes in the following metal finishes:

- Clear Anodised Aluminium
- Anodised Titanium
- Anodised Bronze
- Polished Nickel Plate
- Gold Plate

#### Leather finish

The light comes in the following leather finishes:

- Chocolate
- Beige
- Black
- Mushroom
- Off White

#### Dimensions

Light Depth/509mm Base Depth/80mm Base Width/50mm

#### Electrical

The light uses 1.2 Watts of energy and requires a 12v DC power Supply.

The Zonda light is available in the following switching mode and LED colours.

- Warm White/High, Medium, Off
- Cool White/High, Medium, Off

### Additional information

The Zonda Surface Mount light requires a driver for installing on a Mains voltage circuit. This driver should be installed remotely in a suitable area behind the fitting.

01993 868866

Web: www.beadlight.com Email: contact@beadlight.com