# Beadlight

Sirocco Range/Technical Data Sheet

## SIROCCO


SLIM (INTEGRAL BEZEL)









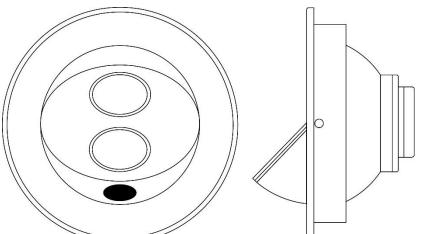

### 21.7 LIGHT OFF LIGHT ON RECOMMENDED APERTURE FOR INSTALLATION Oty 3 M4 clamp screws Qty 1 Anti-rotation screw (self tanging) Ø82 Clamp pla Ø77 PCD REAR VIEW LIGHT OFF FRONT LIGHT ON FRONT

#### **Product Description**

The Sirocco Slim Integral Bezel light is fixed by a mounting ring at the rear of the bed head board. The light is neatly presented through a recess in the bedhead. The lamp can be rotated left and right allowing control of the beam position.

#### Metal finish

The light comes in the following metal finishes:

- Clear Anodised Aluminium
- Anodised Titanium
- Anodised Bronze
- Polished Nickel Plate
- Gold

#### Dimensions

Depth/39.5mm Light Diameter/80mm

#### Electrical

The light uses 1.1 Watts of energy and requires a 12v DC power Supply.

The Sirocco light is available in the following LED colours.

- Warm White
- Cool White

#### Additional information

The Sirocco Slim Integral Bezel light requires a driver for installing on a Mains voltage circuit. This driver should be installed remotely in a suitable area behind the fitting.

01993 868866

Web: www.beadlight.com Email: contact@beadlight.com