
Beadlight®

Vortex Range/Technical Data Sheet

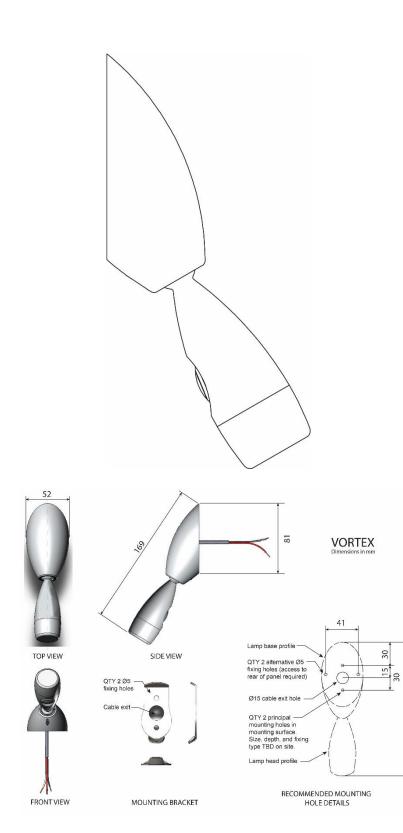

Product Description

The Vortex light is fixed by a hidden bracket The light which features a ball joint mechanism which allows the head to be positioned as required.

Metal finish

The light comes in the following metal finishes:

- Clear Anodised Aluminium
- Anodised Titanium
- Anodised Bronze
- Polished Nickel Plate
- Gold Plate

Dimensions

Depth/52mm Diameter/169mm Cable Length/500mm

Electrical

The light uses 1.68 Watts of energy and requires a 12v DC power Supply.

The Cirrus light is available in the following switching mode and LED colours.

- Warm White/High, Medium, Off

- Cool White/High, Medium, Off

Additional information

The Vortex requires a driver for installing on a mains voltage circuit. This driver should be installed remotely in a suitable are behind the fitting.



Beadlight Ltd

Unit 31B, Avenue One, Station Lane, Witney OX28 4XZ 162.5