



Cabin LED Wall Light, 40cm 7218/40

Product Code	Bulb Cap	Max Wattage	Bulb Type	Height/Length	Width/Diameter	Projection
7218/40	n/a	4.5	LED	400mm	65mm	75mm
Available Finish		Polished chrome / Polished brass /Weathered brass. Frosted Glass				

Side Profile

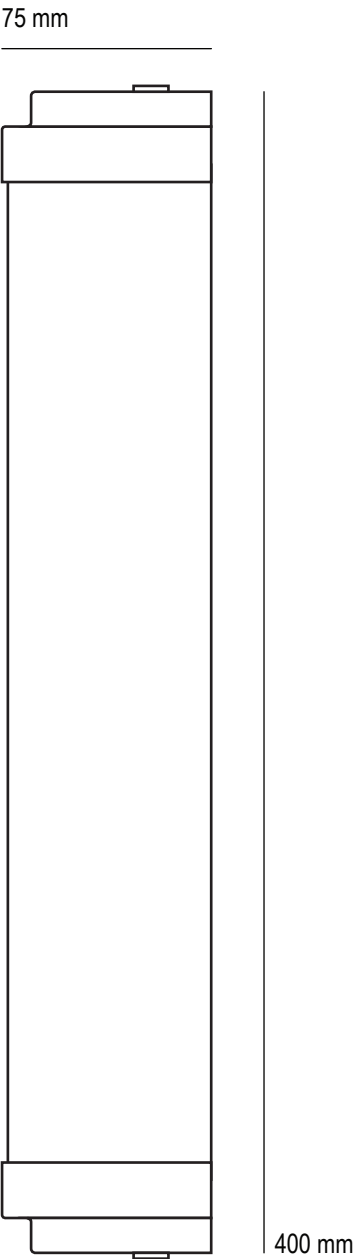

Front

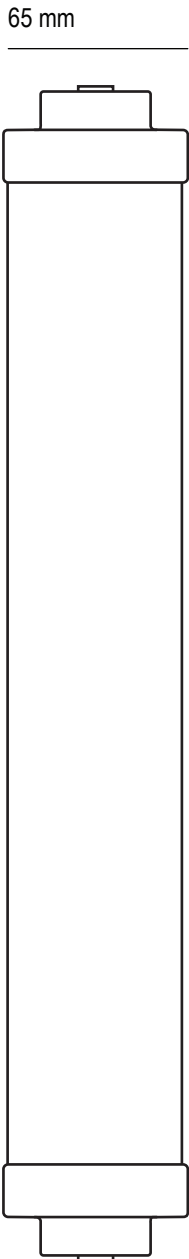


IMPORTANT:
 LOW VOLTAGE LED FITTING - CONNECTION TO REMOTE DRIVER (SUPPLIED) REQUIRED FOR MAINS INSTALLTION

Supplied with integral LED and driver (for remote installation up to 10 meters from the fitting*)
 Fitting is dimmable with trailing edge dimmers**
 IP44 rated
 Warm white tone LED (2700K)
 Available for specific markets
 *Assuming minimum cable gauge is 1.5mm (16AWG)
 **Dimming performance may vary between manufacturers, check minimum load and compatability against dimmer specification.



Backplate

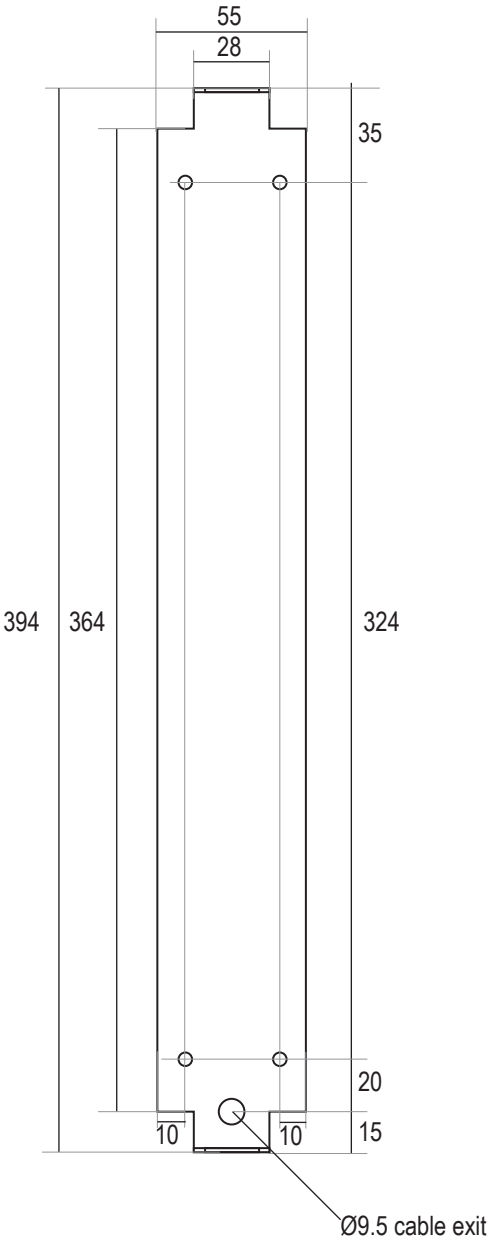

Backplates can be rotated 180 degrees- to allow cable exit to be positioned at top if required.

Stated dimensions are for reference purposes only. Due to manufacturing tolerances, the actual dimensions of each product may differ to those stated.